

OCO-M36BS

High Frequency OCXO Sine Wave



QuartzCom
the communications company



Features

- High frequency: up to 160 MHz
- Ultra Low Phase Noise option


Parameter	Specification					
	OCO-M36BS5			OCO-M36BS12		
Frequency Range	48.000 ~ 160 MHz					
Standard Frequencies	48.000 MHz			100.000MHz		
<u>Operating Temperature Range</u> <u>Code</u>	EH	GH	JK	NK	NN	Z
°C	0 / +60	-10 / +60	-20 / +70	-40 / +70	-40 / +85	Custom
Frequency Stability Code	u50		u10		75n	
vs <u>Operating Temperature Range</u> *Note 2	$\leq \pm 5.0 \times 10^{-7}$		$\leq \pm 1.0 \times 10^{-7}$		$\leq \pm 5.0 \times 10^{-8}$	
vs. Supply Voltage change [Vdc] $\pm 5\%$	$\leq \pm 2 \times 10^{-8}$					
vs. Load change $\pm 5\%$	$\leq \pm 2 \times 10^{-8}$					
vs. Aging after 30 days of operation	$\leq \pm 1 \times 10^{-7}$ 1 st year					
Output waveform	Sine wave					
Output level	> 400 mV RMS					
Output load	50Ω $\pm 10\%$					
Harmonics	< - 30 dBc					
Sub-harmonics	< - 70 dBc					
Supply Voltage [Vdc]	+5.0 V $\pm 5\%$			+12.0 V $\pm 5\%$		
Steady-state current consumption @ +25 °C	< 300 mA			< 150 mA		
Warm-up current consumption @ +25 °C	< 600 mA			< 300 mA		
Warm-up time @ +25 °C	< 180s			< $\pm 5 \times 10^{-7}$		
Electronic Frequency Control [EFC] range	> $\pm 2 \times 10^{-6}$			positive slope		
Voltage Control [Vc]	0 ~ +4.5 V			0 ~ +10.0 V		
Reference voltage output [Vref]	+4.5 V			+10.0 V		
Phase Noise @ 100MHz dBc/Hz			Vdc 5.0 V		Vdc 12.0 V	
	Option	-	LN	-	LN	ULN
	10 Hz	≤ -90	≤ -100	≤ -90	≤ -95	≤ -102
	100 Hz	≤ -120	≤ -130	≤ -120	≤ -125	≤ -135
	1 kHz	≤ -150	≤ -155	≤ -155	≤ -157	≤ -162
	10 kHz	≤ -160	≤ -168	≤ -170	≤ -172	≤ -175
	100 kHz	≤ -165	≤ -170	≤ -170	≤ -175	≤ -180
Storage temperature range	-55 ~ +85 °C					
Environmental test						
Vibration	acceleration: 5 g; 10 Hz up to 500 Hz and down to 10 Hz; all 3 axes					
Shock	75 g, half-sine, 3 ms					

Note 1: unless otherwise specified conditions are @ 25°C still air

Note 2: all combination not possible (consult factory)

Pin function

- 1 # RF output
- 2 # GND
- 3 # Vc
- 4 # Vref
- 5 # Vdc

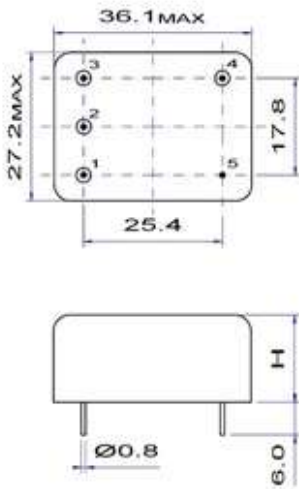

H = 16 mm

Ordering Guide:

OCO-M36BS12-JKu10-ULN-100MHz

Vdc OTR Phase Noise

Connection circuit

