


VTO-SH-H-4p

SMD VC-TCXO
HCMOS


QuartzCom
the communications company



Features

- Applications: telecom infrastructure, broadband access, navigation
- Output signal HCMOS
- Wide frequency range up to 200 MHz
- Low phase noise


Parameter	Specification	
	VTO-SH-3H-4p	VTO-SH-5H-4p
Frequency range	10 ~ 200 MHz	
Standard frequencies	10.000, 13.000, 19.200, 19.440, 20.000, 26.000 & 80.000 MHz	
Frequency stability:		
vs. temperature	$\leq \pm 0.5 \sim \pm 2.5$ ppm	
vs. supply & load change	$\leq \pm 0.2$ ppm	± 5 %
vs. aging	$\leq \pm 1.0$ ppm	1 st year
Frequency tolerance ex. factory	$\leq \pm 1.0$ ppm	@ +25 °C
Supply voltage	+3.3 V ± 5 %	+5.0 V ± 5 %
Supply current	10 ~ 65 mA	
Output signal	HCMOS	
Output load	15 pF	
Frequency pulling range	$\pm 5 \sim \pm 20$ ppm	
Voltage control	+1.65 V ± 1.35 V	+2.5 V ± 2.0 V
Phase noise @ 19.44 MHz carrier frequency	-115 dBc/Hz -140 dBc/Hz -150 dBc/Hz	@ 100 Hz @ 1 kHz @ 10 kHz
Operating temperature range	-20 ~ +70 °C -40 ~ +85 °C	commercial application industrial application
Storage temperature range	-55 ~ +125 °C	
Packaging units	tape & reel tray	500 pieces 50 pieces
Customer specifications on request		

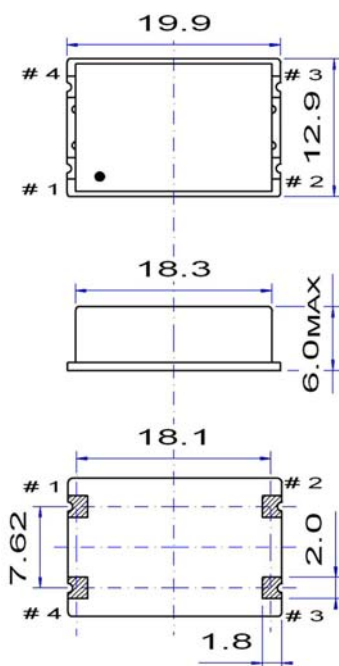

Pin function


- # 1 Vc Voltage control
- # 2 GND
- # 3 Output
- # 4 Vdc

Example for solder pattern



Do not design any conductive path between the pattern

Example for IR reflow soldering temperature

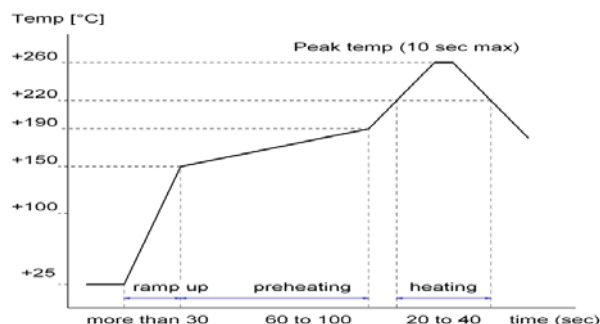

2002/95/EC RoHS compliant

02 May. 10