

VT3-801-C3M-HPG


High stability, ultra-low phase noise and low jitter
low G-sensitivity, vibration resistant, (LV)HCMOS (VC)TCXO



Application: 5G Repeaters, Link and micro cells, Low noise microwave

Frequency range	50 to 150 MHz		
Standard frequencies	50, 75, 100, 125 MHz		
Frequency stability:			
vs. temperature reference to (F _{MAX} +F _{MIN})/2	≤ ±1.0ppm ≤ ±0.5 ppm	over -40 to +85 °C over -40 to +85 °C	standard optional (1)
vs. supply voltage changes reference to frequency at nominal supply	≤ ±0.05 ppm	±5%	
vs. load changes reference to frequency at nominal load	≤ ±0.05 ppm	±10%	
vs. aging	≤ ±1.0 ppm	1 st year @+40 °C	
Short term stability ADEV	< 1*10 ⁻¹⁰	τ = 1 sec.	
G-sensitivity	0.50 ppb/g 0.25 ppb/g	per axis, max. per axis, typ.	optional (2)
Frequency tolerance ex factory	0 ~ +1 ppm	@+25 °C	
Supply voltage	3.3 V	or 5.0 V	
Current consumption	< 45 mA	without load	
Output signal	(LV)HCMOS	V _{OH} > 0.9 x V _{CC}	V _{OL} < 0.1 x V _{CC}
Symmetry	50 %	±5%	
Output load	10 pF	max.	
Electronic Frequency Control (EFC)	ΔF > ±5 ppm	positive slope	
Control voltage V _c	+1.50 V ±1.0 V	+2.50 V ±2.0 V	by 5.0 V
Phase noise (typical value for 125 MHz)	-105 dBc/Hz -128 dBc/Hz -150 dBc/Hz -170 dBc/Hz -175 dBc/Hz	@ 100 Hz @ 1 kHz @ 10 kHz @ 100 kHz @ 1'000 kHz	
RMS phase jitter	10 fs (typ.)	12 kHz ~ 20 MHz	
Sub-harmonics	< -60 dBc		
Operating temperature range	-40 ~ +85 °C		
Storage temperature range	-55 ~ +105 °C		
Reflow Profiles as per IPC/JEDEC J-STD-020C	≤ 245 °C over 10 sec. Max.		


- Notes: 1. For tighter frequency stability (≤ ±0.50 ppm), consult the factory
2. For lower G-sensitivity (< 0.2 ppb/g) , consult the factory

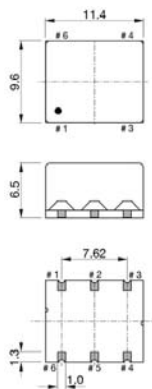


Pin function

- # 1 V_c (EFC) for (VC)TCXO
GND or NC for TCXO
- # 2 NC or GND
- # 3 GND
- # 4 RF output
- # 5 NC or GND
- # 6 V_{CC}

Solder pattern



Test circuit



2011/65/EU RoHS compliant

Page 1 of 1 28 Mar. 19

QuartzCom AG
Bruehlstrasse 15
CH 2540 Grenchen
Switzerland

Fax +41 32 644 24 05
Tel +41 32 644 24 00
E-Mail sales@quartzcom.com
www.quartzcom.com

From design to production
in Switzerland

