


PXO-P9-3PEM-6p

LVPECL SMD Clock Oscillator
Multiplier


QuartzCom
the communications company



Features

- Applications: SDH / ATM, Gigabit Ethernet, switching system and telecom infrastructure
- Output frequency up to 700 MHz
- Low cost


Parameter	Specification	
Frequency range	100 ~ 700 MHz	
Standard frequencies	120.00, 122.88, 155.52, 307.2, 320, 491.52 & 622.08 MHz	
Supply voltage	+3.3 V \pm 5 %	other supply voltage on request
Supply current	75 ~ 100 mA	
Frequency stability (*)	< \pm 25 ppm < \pm 50 ppm	over -20 ~ +70 °C over -40 ~ +85 °C
Output signal	LVPECL	
Output voltage	$V_{OH} \geq 2.275$ V	$V_{OL} \leq 1.680$ V
Output load	50 Ω	@ Vdc -2.0 V
Jitter (rms) 1 σ	< 3 ps	@ 12 kHz ~ 20 MHz from carrier frequency
Symmetry	45 ~ 55 %	@ 1/2 Vdc
Rise / fall time	< 0.4 ns	20 % to 80 % of amplitude
Enable / Disable function	pin #1 = high or open pin #1 = low	pin #4 & #5 \rightarrow (E) enable pin #4 & #5 \rightarrow (D) disabled to Hi-Z
Operating temperature range	-20 ~ +70 °C -40 ~ +85 °C	commercial application industrial application
Storage temperature range	-55 ~ +125 °C	
Packaging unit	tape & reel	500 or 1'000 pieces
(*) All inclusive: frequency stability vs. temperature, tolerance, aging, supply & load variation		
Customer specifications on request		

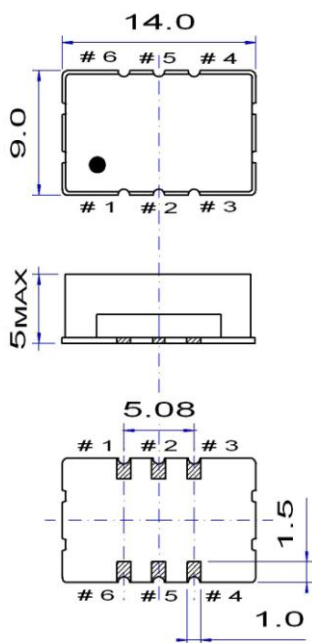

Pin function


- # 1 E/D or not connected
- # 2 not connected or E/D
- # 3 GND
- # 4 Output
- # 5 Complementary output
- # 6 Vdc

Example for solder pattern



Do not design any conductive path between the pattern

Example for IR reflow soldering temperature

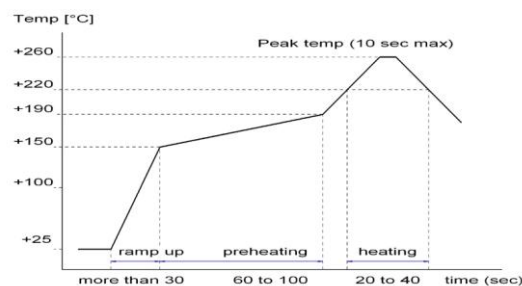

2002/95/EC RoHS compliant

20 Apr. 10

QuartzCom AG
sales@quartzcom.com

QuartzCom Asia
sales-asia@quartzcom.com

QuartzCom USA
sales-usa@quartzcom.com

www.quartzcom.com